

**General Data**

Emission Compliance	Stage V/T4f
Free Air Delivery	12.0 m3/min
Free Air Delivery - High Pressure mode	10.6 m3/min
Rated Operating Pressure	6.90 bar
Rated Operating Pressure - High Pressure mode	10.30 bar

**Engine**

Make	Cummins
Model	F3.8
Number of Cylinders	4.0
Full load speed	2300.0 / 2075.0 RPM
Power	100.0 kW
Electrical	24 V
Cooling	Water
Fuel Tank capacity	238.00 L
AdBlue tank capacity	19.00 L

**Sound Level Data**

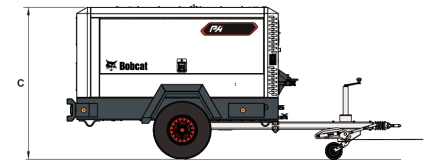
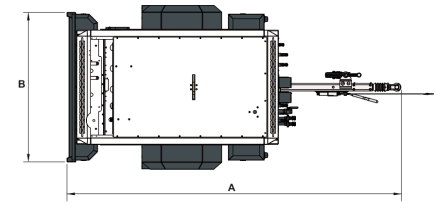
Fully compliant to outdoor noise directive 2000/14/EC (2006)	99.0
--	------

**Weights**

Weight (net) fixed/adjustable	2140/2210 kg
Weight (working) fixed/adjustable	2360/2430 kg
Weight max (ref. Dataplate)	2700 kg
Weight on shipping support (net)	2050 kg
Weight on shipping support (working)	2270 kg

**Standard Features**

Central lifting point	Dual mode machine
Fuel/water separator	Emergency stop
No roadlights	Steel
"Push after warm-up" button	Toolbox
Bunded base with 110% fluids containment with central drains	28mm tow eye
Document box	40mm tow eye
Jockey Wheel	50mm tow eye
Diesel particulate filter	68mm tow eye
Spark Arrestor	76mm tow eye
Battery isolator	50mm ball hitch

**Dimension**


(A)	4060.0 mm	(B)	1985.0 mm
(A*)	2760.0 mm	(C)	1830.0 mm